

### 1

Attach ceiling plate to outer pipe with round plate and fastener. Secure as indicated. Insert inner pipe into outer pipe at desired length and secure as indicated.

### 2

Secure assembly to ceiling using appropriate fixings. We have provided plastic anchors, but consult a professional to ensure these are compatible with your ceiling.

### 3

Fix 'U'-shaped bracket to large plate using carriage bolts and locknuts. Attach to ceiling assembly using nuts and bolts as indicated.


### 4

Fasten the two vertical brackets to the back of the TV using appropriate screws. We have included 15 mm M6 and M8 screws, but your TV may require different sizes.

### ⚠ WARNING :


1. The plate must be installed on a strong ceiling.
2. Tighten the screws so that the bracket is firmly attached, but do not over-tighten. Over-tightening can damage the screws, greatly reducing their ability to hold.
3. Do not remove or loosen screws unless the TV is removed. Doing so may cause it to fall.
4. This product should be installed by a qualified tradesman.

Maximum VESA hole spacing : 680 x 430 mm  
 For TV sizes : 32 to 60 inch  
 Maximum load : 40 kg

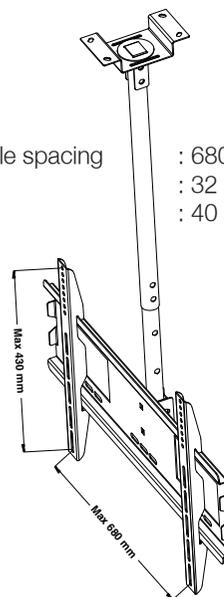

### 5

Use the vertical brackets to hook the TV onto the ceiling mount plate, and tighten the screw as illustrated.

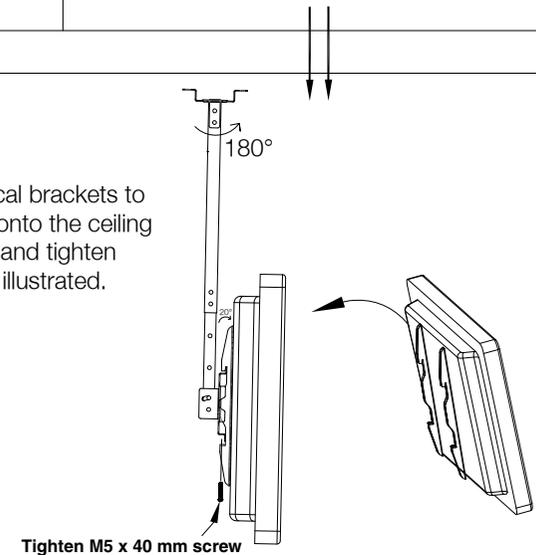

Do not attempt to lift the TV by yourself.